



Waterproof series PAR30

High Output, Waterproof PAR30 LED lamp



Ø 9.5 cm

11.3 cm





Model No	CCT (K)	Beam Angle	Power (W)	Lumens (lm)	Efficacy (lm/W)	Voltage	Base Type	Life (hrs)	Dimmable
LL-P30E221-M	3,000K Moon White	60°	6x2 Watts	700	58.34	110-120 VAC	E26	25,000	NO



Ø 9.5 cm

9.8 cm





Model No	CCT (K)	Beam Angle	Power (W)	Lumens (lm)	Efficacy (lm/W)	Voltage	Base Type	Life (hrs)	Dimmable
LL-P30E321-M	3,000K Moon White	60°	7x2 Watts	1,000	71.43	110-120 VAC	E26	25,000	NO



Ø 9.7 cm


9.4 cm




Model No	Colors available	Beam Angle	Power (W)	Lumens (lm)	Efficacy (lm/W)	Voltage	Base Type	Life (hrs)	Dimmable
LL-P30E421	Warm & Cool White, Red, Green, Blue	120°	7 Watts 90 x SMD 3528	500	71.43	110-120 VAC	E26	25,000	NO

Waterproof series PAR38


High Output, Waterproof PAR38 LED lamp

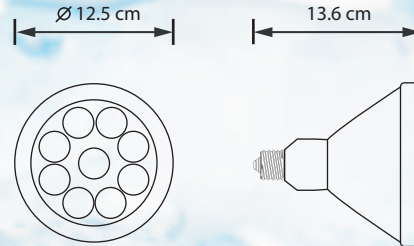

Model No	CCT (K)	Beam Angle	Power (W)	Lumens (lm)	Efficacy (lm/W)	Voltage	Base Type	Life (hrs)	Dimmable
LL-P38E221-M	3,000K Moon White	60°	9x2 Watts	1,050	58.34	110-120 VAC	E26	25,000	NO

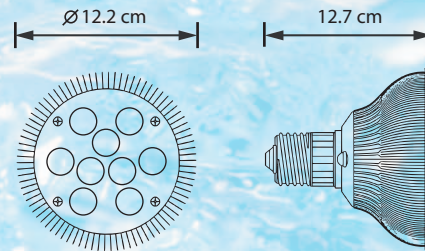

Model No	CCT (K)	Beam Angle	Power (W)	Lumens (lm)	Efficacy (lm/W)	Voltage	Base Type	Life (hrs)	Dimmable
LL-P38E321-M	3,000K Moon White	60°	9x2 Watts	1,300	72.23	110-120 VAC	E26	25,000	NO

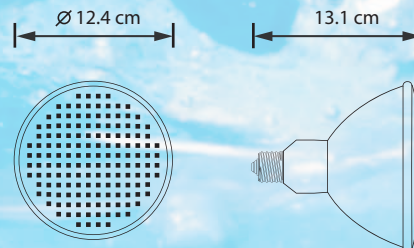

Model No	Colors available	Beam Angle	Power (W)	Lumens (lm)	Efficacy (lm/W)	Voltage	Base Type	Life (hrs)	Dimmable
LL-P38E421	Warm & Cool White, Red, Green, Blue	120°	12 Watts 188 x SMD 3528	1,000	83.34	110-120 VAC	E26	25,000	NO